



Flygt C-pumps 3068

-3800

Submer Sible wa Ste and raw water pump

S

Flygt submersible pumps for a variety of applications

Submersibles Flygt pumps operate directly in the liquid being pumped, which means they require neither special housing nor a superstructure to support them, considerably reducing construction costs. They are smaller than nonsubmersible counterparts as the motor and hydraulics are integrated into one compact unit, resulting in smaller pumping stations that are less complex to build. Operating submerged they take up less space, and noise and cooling problems are virtually eliminated.

This series of pumps has an extensive performance range and can be used in a variety of applications:

- Pumping sewage in municipal applications
- Irrigation
- Industrial effluent
- Cooling water
- Stormwater
- Process water
- Raw water

An extensive range of hydraulic units, such as impeller and volute, are available to handle different types of media. The application ranges up to approx. 3000 l/s. A variety of drive units, with motor ratings up to 680 kW 50 Hz, 1040 hp/775 kW 60 Hz are also available. The standard version of these pumps are made in cast iron and for more demanding applications the pumps can be supplied in industrial configurations. Explosionproof versions are also available.



Methods of installation

To reduce the cost of installation Xylem has standardized many of the main elements of pumping stations so that they can be combined to match specific site conditions.

The examples illustrated here show the flexibility of the system, and provide some guidelines for optimizing the design of your own station.



CP - For semipermanent wet well installations. The pump is installed with twin guide bars on a discharge connection.



CS - A semipermanent, freestanding installation. Transportable version with pipe or hose connection.



CT - A vertically mounted, permanent dry well or inline installation with flange connections for suction and discharge pipe work.




CZ - A horizontally mounted, permanent dry well or inline installation with flange connections for suction and discharge pipe work.


General performance range up to 3000 l/s

Flygt C-pumps


C3000 50Hz

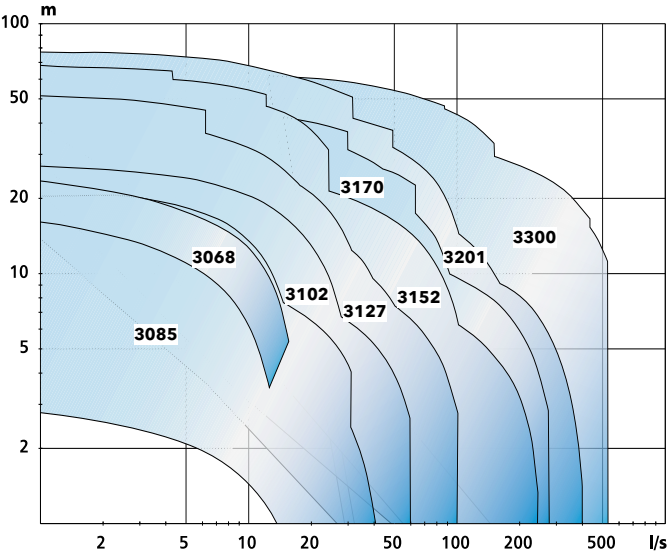


C3001 50Hz

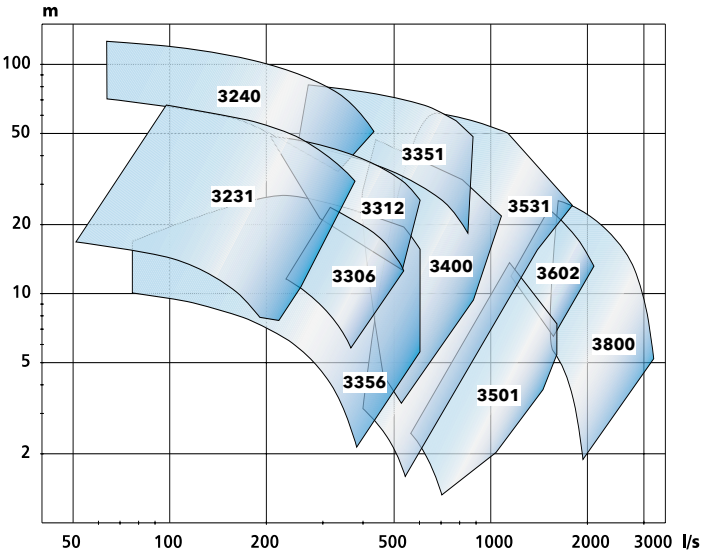

C3000 60Hz

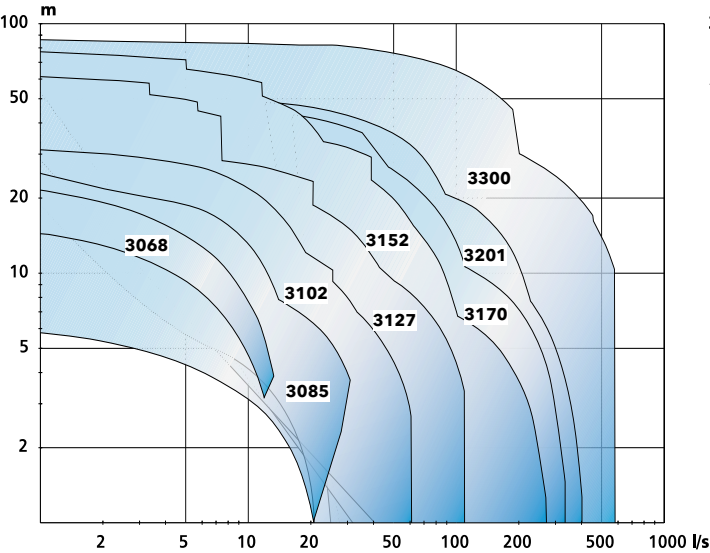

C3001 60Hz

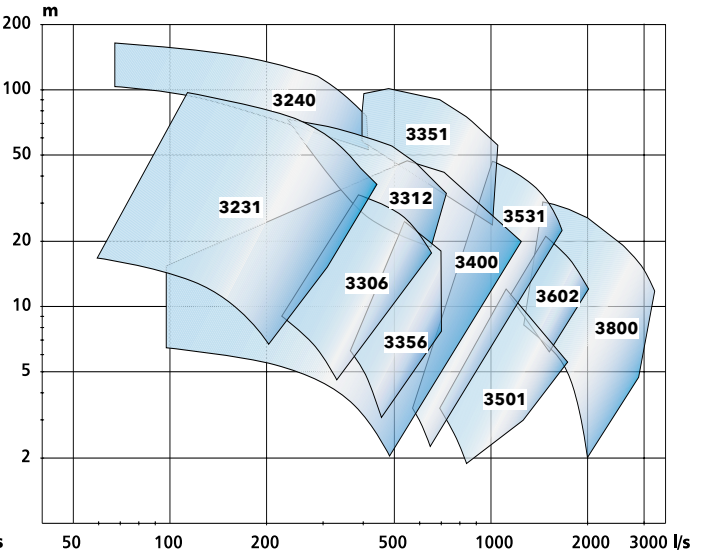

Product quality in every detail

Motor

Squirrel cage, high performance induction motor, specially designed and manufactured by Xylem for submersible use. Stator windings are trickle impregnated in resin to class H insulation and rated at 180° C (355° F). Many units provide up to 30 starts per hour.

Shaft


A short overhang of the shaft virtually eliminates shaft deflection. This results in significantly increased seal and bearing life, low vibration and quiet operation.

Seals

Two sets of mechanical shaft seals that work independently for double security. Designed, patented and manufactured by Xylem.

Oil housing

In addition to lubricating the seals, the foodgrade oil filled compartment diffuses heat from the motor and the bearings. The housing also provides additional security against penetration by liquids.

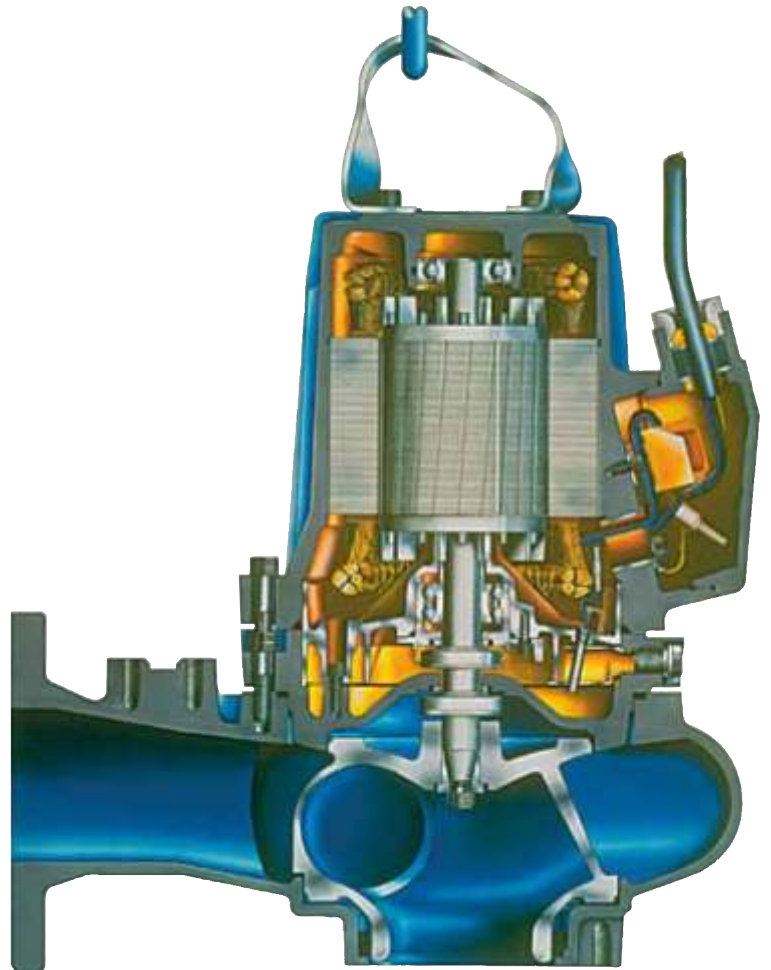

Impeller


The Flygt Nevaclog® impeller is designed specially for smaller Flygt Cpumps. Our Flygt Nevaclog® has excellent flow passing properties, because parts that might cause clogging in the impeller channel have been eliminated. This, coupled with the volute's design is what enables waste water to flow freely.



Sealwearprotection

Spinout™ is a patented design that protects the outer seal by expelling abrasive particles from the seal chamber. As an integral part of the cast iron housing, Spinout™ is as simple as it is effective.

Product quality in every detail

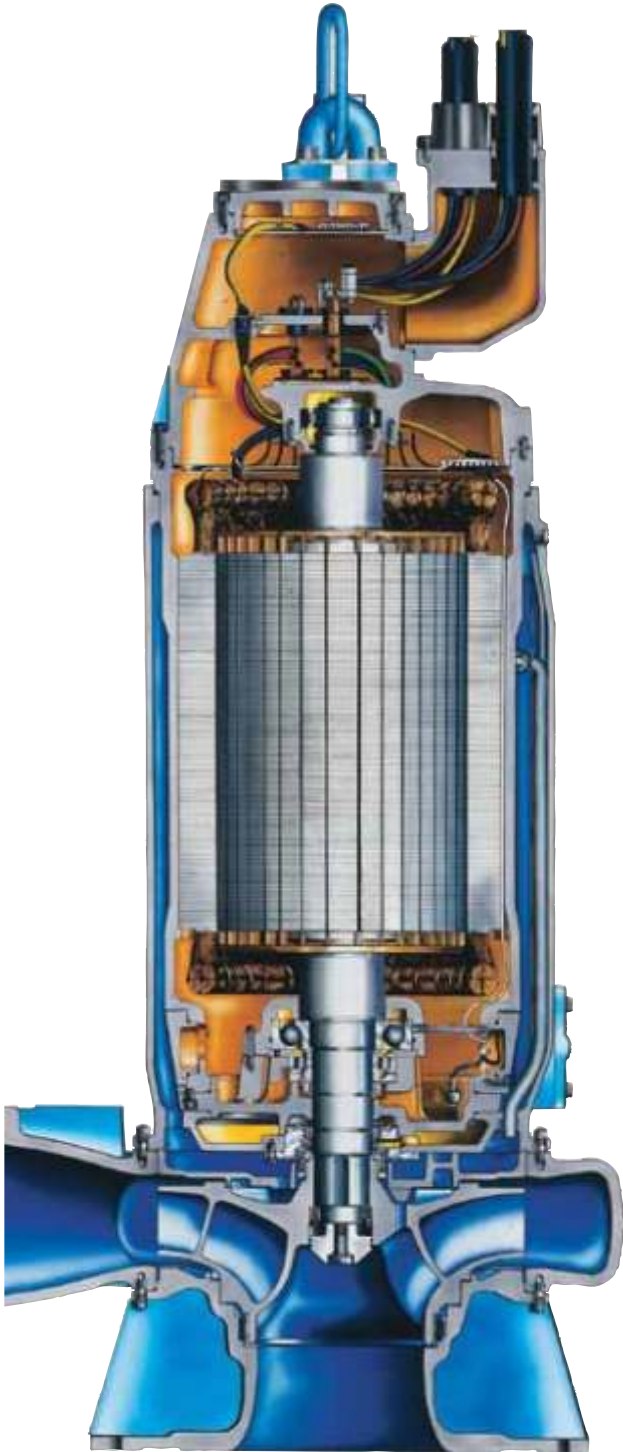

Monitoring

Thermal sensors embedded in the stator windings help prevent over heating. Leakage sensors in the stator and oil housings, together with external monitoring equipment, are available as options.

Cable entry

The cable entrance is designed to incorporate both a seal and a strain relief function.

International standards approvals

All pumps are tested and approved in accordance with national and international standards (IEC 341 CSA). They are also available in explosionproof versions - Factory Mutual and European Norm (FM and EN) approvals.

Cooling System

In normal applications the surrounding liquid cools the pump motor. In more demanding applications, or when dry installed, the pumps can be fitted with an integrated cooling system.

Impeller


The multivane impellers for bigger pumps are designed for optimum hydraulic efficiency. The impellers are dynamically balanced and machined to match the requested duty point. The area in the pump housing at the upper and lower shroud of the impeller has a labyrinth seal design to prevent leakage and clogging, thus improve the efficiency. Replaceable wear rings are standard.




Accessories for trouble-free, efficient pumping

Supplying customers with problemfree solutions is our goal at Xylem - and that means more than simply supplying the correct pump for your particular application.

The following are examples of some of the ancillary equipment and systems which we can supply as aids to improving the allround efficiency of your operation.

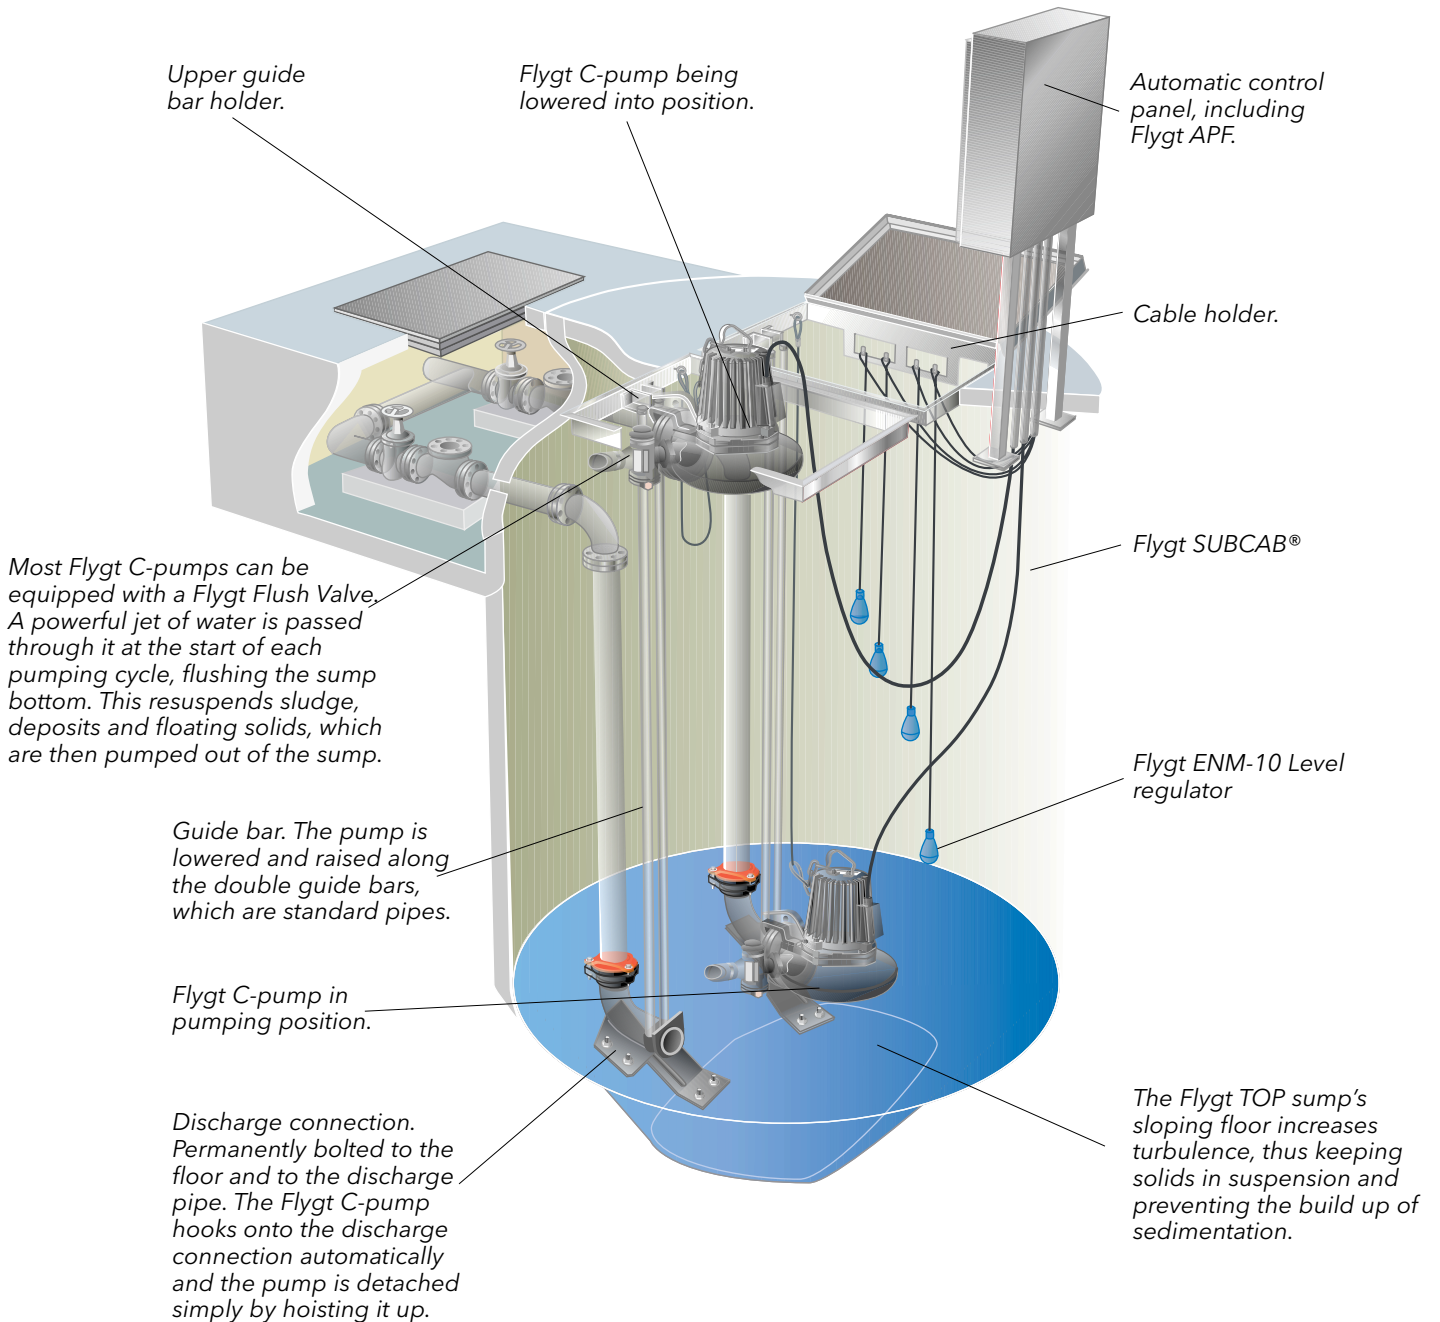

Monitoring and control equipment

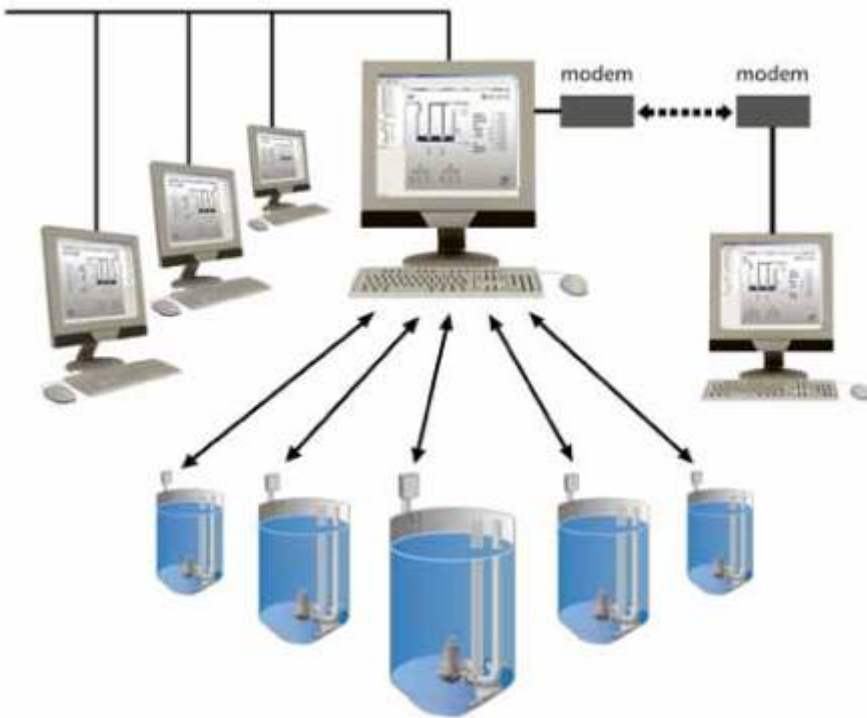

Intelligent systems for pumps and mixers

At Xylem we produce monitoring and control systems for a wide range of pumps and mixers. Our systems offer lower maintenance costs, reliability, long life and reduced energy consumption.

As well as supplying the hardware, such as pump controllers, sensors, electrical start equipment and cables, we also have software for running the system. The Flygt AquaView supervision software provides the PC-based SCADA knowhow.

Our systems can be used to run and monitor applications working in sewage treatment plants, sewage and drainage pumping and mixing.

World-wide service, world-class value

No two pumping stations and systems will be alike, so the level of maintenance and support that you require from your service partner will differ according to your situation. With Xylem, you can choose the type of support package that precisely meets your needs.

From simply supplying pumps to your specifications, to full service assistance on system planning, design, construction, implementation, operation or maintenance: Xylem's total service concept means that you get the service you need, on your terms.

15-year spare parts guarantee

We guarantee availability of spare parts for at least 15 years after we stop production of a pump model. This is just one of the ways in which Xylem meets its longterm commitment to customers.



XYLEM is a leader in efficient, sustainable water technologies and applications. With 12,500 employees in more than 150 countries, Xylem is committed to serve municipal water, wastewater, residential and commercial building services and industrial markets; Xylem is focused on one of the world's biggest issues - water.

Our Value Centers serve the world.

Water Infrastructure

Water Solutions provide wastewater and dewatering pumps, biologic treatments, and filtration and disinfection products for municipal and industrial use.

Analytics manufactures premium laboratory, field, portable, and online instruments for precise measurement, serving industries from environmental to educational.

Applied Water Systems

Residential and Commercial Water supports the efficient movement and use of water in homes, commercial buildings, agriculture and irrigation.

Flow Control with its collaborative structure of experienced people, proven technologies and innovative products strives towards realizing and deploying its expertise at niche applications in food processing, beverage, pharmaceuticals, off-highway equipment, chemical processing, oil & gas and rural water management.

Xylem Water Solutions India Pvt. Ltd.

India Head Office
Ground & First floor
Vishnu Shivam Mall
Thakur Village, Kandivali [East]
Mumbai - 400 101
Tel: +91 22 4037 0370
Fax: +91 4037 0371

Delhi Office
H-20, Bali Nagar
New Delhi - 110015
Tel: +91 11 4555 2806
Fax: +91 11 2519 5007

Registered Office & Factory
Plot No. 731, GIDC Savli
Manjusar, Savli Road
Vadodara - 391770
Tel: +91 2667 265800
Fax: +91 2667 265802

Bengaluru Office
No. 7, Kumara Park East
Kumara Park East Extension
Bengaluru - 560001
Tel: +91 80 4281 6800
Fax: +91 80 4281 6801

www.xyleminc.com / www.xylemindia.in

Chennai Office
Ghatala Towers, 1st floor
19, Avenue Road
Nungambakkam
Chennai - 600034
Tel: +91 44 4043 5555
Fax: +91 44 4043 5550

Pune Office
Xylem Water Solutions India Pvt. Ltd.
2nd Floor, Anmol Pride Unit 3
Baner Road, Pune 411045
Tel: +91-8451056627

Email: indiasales@xyleminc.com, indiaservice@xyleminc.com

The specifications and features may change before prior notice.